



Date: Aug 4, 2026

CTA Lighting & Controls
908C West River Center Drive
Comstock Park MI 49321
Phone: (616) 647-2400

Job Name
13960 Ironwood Dr Phase II
CTA26-183742
Grand Rapids Mi

Bid Date
Aug 4, 2026

Submittal Date
Aug 4, 2026



Transmittal

CTA Lighting & Controls
 908C West River Center Drive
 Comstock Park MI 49321
 Phone: (616) 647-2400
From: Brian Lock

Project 13960 Ironwood Dr Phase II
Quote# CTA26-183742
Location Grand Rapids Mi
 Contact:

ATTACHED WE ARE SENDING YOU 1 COPY OF THE FOLLOWING ITEM:

- | | | |
|-----------------------------------|---|--------|
| ☐ Drawings | ☐ Specifications | Other: |
| ☐ Prints | ☐ Information | |
| ☐ Plans | ☐ Submittals | |

THESE ARE TRANSMITTED FOR:

- | | | |
|--|---|---------------------------------|
| ☐ Prior Approval | ☐ Resubmittal for Approval | ☐ Record |
| ☐ Approval | ☐ Corrections | Bids due on: |
| ☐ Approval as Submitted | ☐ Your Use | Other: |
| ☐ Approval as Noted | ☐ Review and Comment | |

Type

P4
 P4
 W4

MFG

Lumark
 United Lighting Standards
 Lumark

Part

[PRV-PA2B-740-U-T4W-SA-BZ](#)
[RPSQ-20-4-11](#)
[PRV-C25-740-D-UNV-T4-WM-BZ](#)

Project		Catalog #		Type	
Prepared by		Notes		Date	



Lumark

Prevail Discrete LED

Area / Site Luminaire

Product Features



Interactive Menu

- Ordering Information page 2
- Mounting Details page 3, 4
- Optical Configurations page 5
- Product Specifications page 5
- Energy and Performance Data page 6
- Control Options page 8

Product Certifications




Quick Facts

- Direct-mounted discrete light engine for improved optical uniformity and visual comfort
- Lumen packages range from 4,300 - 68,000 nominal lumens (30W - 550W)
- Replaces 70W up to 1,000W HID equivalents
- Efficacies up to 157 lumens per watt
- Standard universal quick mount arm with universal drill pattern

Connected Systems

- WaveLinX PRO Wireless
- WaveLinX LITE Wireless

Dimensional Details

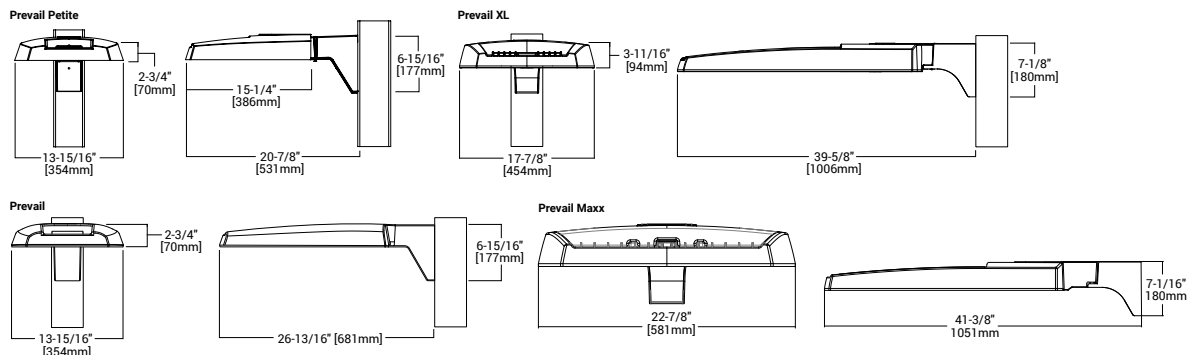

NOTES:
 1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
 2. IDA Certified for 3000K CCT and warmer only.

Submitted by CTA Lighting & Controls	Job Name: 13960 Ironwood Dr Phase II	Catalog Number: PRV-PA2B-740-U-T4W-SA-BZ Notes:	Type: P4 CTA26-183742
--------------------------------------	--	---	---

Lumark

Prevail Discrete LED

Ordering Information

SAMPLE NUMBER: PRV-XL-PA4B-740-U-T4W-BZ

Product Family ^{1,2}	Light Engine		Color Temperature	Voltage	Distribution	Mounting (Included)	Finish
	Configuration	Drive Current ⁴					
PRV-P =Prevail Petite BAA-PRV-P =Prevail Petite BAA Buy American Act Compliant ³ TAA-PRV-P =Prevail Petite TAA Trade Agreements Act Compliant ³ BABAE-PRV-P =Prevail Petite Build America Buy America Act Compliant ³⁰ BABAF-PRV-P = Prevail Petite Build America Buy America Act Compliant ³⁰	PA1 =1 Panel, 24 LED Rectangle	A =400mA Nominal B =700mA Nominal C =950mA Nominal D =1200mA Nominal	740 =70CRI, 4000K 730 =70CRI, 3000K 750 =70CRI, 5000K 8540 =85CRI, 4000K	U =Universal, 120-277V H =High Voltage, 347-480V 1=120V 2=208V 3=240V 4=277V 8 =480V ⁵ 9 =347V DV =DuraVolt, 277-480V ^{5,6}	T2R =Type II Roadway T2U =Type II Urban T3 =Type III T4W =Type IV Wide SWQ =Type V Square Wide	SA =QM Standard Versatile Arm MA =QM Mast Arm FMA =Fixed Mast Arm ²⁶ WM =QM Wall Mount Arm ADJA-WM = Adjustable Arm - Wall Mount ²⁸ ADJA =Adjustable Arm - Pole Mount ²⁸ ADJS =Adjustable Arm - Slipfitter, 3" vertical tenon ²⁴ SP2 =Adjustable Arm - Slipfitter, 2 3/8" vertical tenon ^{24, 28}	AP =Grey BZ =Bronze BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White
PRV =Prevail BAA-PRV =Prevail BAA Buy American Act Compliant ³ TAA-PRV =Prevail TAA Trade Agreements Act Compliant ³ BABAE-PRV =Prevail Build America Buy America Act Compliant ³⁰ BABAF-PRV =Prevail Build America Buy America Act Compliant ³⁰	PA1 =1 Panel, 24 LED Rectangle PA2 =2 Panels, 48 LED Rectangles	A =700mA Nominal B =950mA Nominal					
PRV-XL =PRV XL BAA-PRV-XL =Prevail XL BAA Buy American Act Compliant ³ TAA-PRV-XL =Prevail XL TAA Trade Agreements Act Compliant ³ BABAE-PRV-XL =Prevail XL Build America Buy America Act Compliant ³⁰ BABAF-PRV-XL =PrevailXL Build America Buy America Act Compliant ³⁰	PA3 =3 Panels, 72 LED Rectangles PA4 =4 Panels, 96 LED Rectangles	A =750mA Nominal B =950mA Nominal					
PRV-M =Prevail Maxx BAA-PRV-M =Prevail Maxx BAA Buy American Act Compliant ³ TAA-PRV-M =Prevail Maxx TAA Trade Agreements Act Compliant ³ BABAE-PRV-M =Prevail Maxx Build America Buy America Act Compliant ³⁰ BABAF-PRV-M =Prevail Maxx Build America Buy America Act Compliant ³⁰	PA6 = 6 Panels, 144 LED Rectangles	A =600mA Nominal B =800mA Nominal C =1000mA Nominal D =1200mA Nominal					
Options (Add as Suffix)				Accessories (Order Separately) ^{28, 21}			
10K =10kV UL 1449 Fused Surge Protective Device 20MSP =20KV MOV Surge Protective Device 20K =20kV UL 1449 Fused Surge Protective Device F =Single Fuse (Used with Voltages 120, 277 or 347V) FF =Double Fuse (Used with Voltages 208, 240 or 480V) FADC =Field Adjustable Dimming Controller ²⁵ L90 =Optics Rotated 90° Left R90 =Optics Rotated 90° Right CC =Coastal Construction finish ⁹ HSS =House Side Shield (Factory Installed) ⁷ HA =50°C High Ambient Temperature ⁸ PR =NEMA 3-PIN Twistlock Photocontrol Receptacle ¹⁰ PR7 =NEMA 7-PIN Twistlock Photocontrol Receptacle ¹⁰ MS/DIM-L08 =Motion Sensor for Dimming Operation, Up to 8' Mounting Height ^{11, 12, 13} MS/DIM-L20 =Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ^{11, 12, 13} MS/DIM-L40 =Motion Sensor for Dimming Operation, 21' - 40' Mounting Height ^{11, 12, 13} SPB1 =Motion Sensor for Dimming Operation, BLE Interface, Up to 8' Mounting Height ^{11, 14} SPB2 =Motion Sensor for Dimming Operation, BLE Interface, 8' - 20' Mounting Height ^{11, 14, 28, 27} SPB4 =Motion Sensor for Dimming Operation, BLE Interface, 21' - 40' Mounting Height ^{11, 14, 27}				PRVSA-XX =Standard Arm Mounting Kit ²¹ PRVMA-XX =Mast Arm Mounting Kit ²¹ PRVWM-XX =Wall Mount Kit ²¹ PRV-ADJA-XX =Adjustable Arm - Pole Mount Kit ²¹ PRV-ADJS-XX =Adjustable Arm - Slipfitter Kit ²¹ PRV-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²¹ PRVXLSA-XX =Standard Arm Mounting Kit ²⁷ PRVXLMA-XX =Mast Arm Mounting Kit ²⁷ PRVXLWM-XX =Wall Mount Kit ²⁷ PRV-XL-ADJA-XX =Adjustable Arm - Pole Mount Kit ²⁷ PRV-XL-ADJA-WM-XX = Adjustable Arm - Wall Mount Kit ²⁷ PRV-XL-ADJS-XX = Adjustable Arm - Slipfitter Kit ²⁷ PRV-M-ADJA-XX =Adjustable Arm - Pole Mount Kit ²⁸ PRV-M-ADJS-XX =Adjustable Arm - Slipfitter Kit ²⁸ PRV-M-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²⁸ MA1010-XX =Single Tenon Adapter for 3-1/2" O.D. Tenon MA1011-XX =2@180° Tenon Adapter for 3-1/2" O.D. Tenon			

NOTES:













- DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.
- Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications. Refer to installation instructions and pole white paper WPS13001EN for additional support information.
- Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
- Nominal drive currents shown here. For actual drive current by configuration, refer to Power and Lumens tables.
- 480V not to be used with ungrounded or impedance grounded systems.
- DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit www.signify.com/duravolt for more information.
- House Side Shield not for use with SWQ distribution.
- Not available with PA1D light engine in Petite housing (PRV-P).
- Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654.
- If High Voltage (H) or DuraVolt (DV) is specified, use a photocontrol that matches the input voltage used.
- Controls system is not available in combination with a photocontrol receptacle (PR or PR7) or another controls system (MS SPB).
- Option not available with High Voltage (H) or DuraVolt (DV). Must specify Universal (U), 347V (9), or 480V (8) voltage.
- Utilizes the Wattstopper sensor FSP-211. Sensor color white unless specified otherwise via PDR. To field-configure, order FSIR-100 accessory separately.
- Utilizes the Wattstopper sensor FSP-3XX series. Sensor color determined by product finish. See Sensor Color Reference Table. Field-configures via mobile application. See Controls section for details.
- Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F).
- Replace XX with sensor color (WH, BZ or BK).
- Only available in PRV-XL configurations.
- Not available with High Voltage (H, DV, 8 or 9) or HA options.
- Replace XX with paint color.
- For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
- Not for use with PRV-XL or PRV-M configurations.
- Only for use with PRV. Not applicable to PRV-M, PRV-XL, or PRV-P.
- Must order one per optic/LED when ordering as a field-installable accessory (1, 2, 3, 4, or 6). Refer to House Side Shield reference table for details.
- This tool enables adjustment to Motion Sensor (MS) parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative for more information.
- Requires 7-PIN NEMA twistlock photocontrol receptacle (PR7) option. The WOLC-7 cannot be used in conjunction with other controls systems (MS). Only for use at 120-347V.
- Only available for PRV-M configurations.
- Only for use with PRV-XL.
- Fixed for PRV-M
- Cannot be used with PR7 or other motion response control options.
- Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. BABAE designates the product will meet the standards set for FHWA. As noted these projects must receive Government Funding by October 1, 2025. BABAF designates the product will meet the standards set for FHWA and FTA. As noted these projects must receive Government Funding by October 1, 2026. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.



Lumark

Prevail Discrete LED

Mounting Details

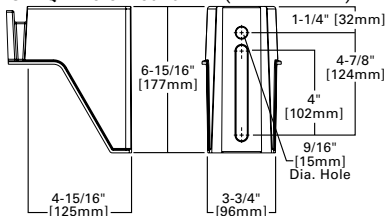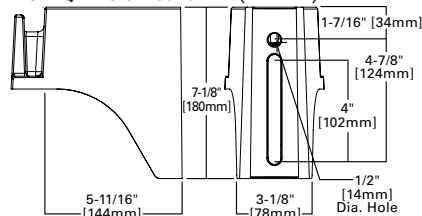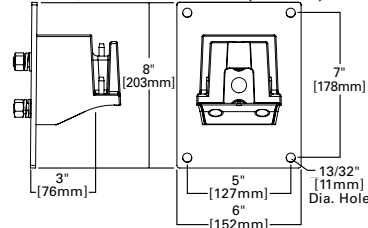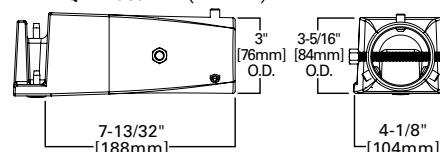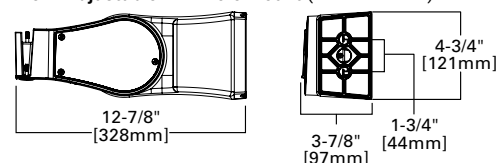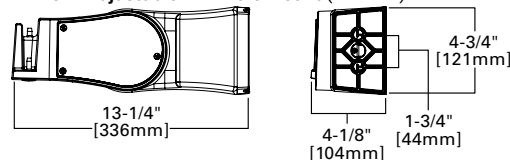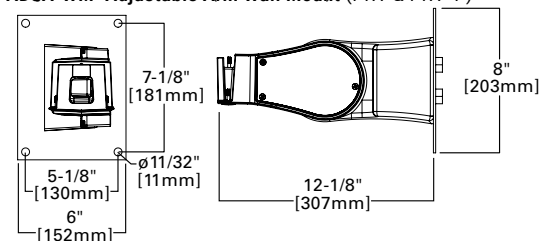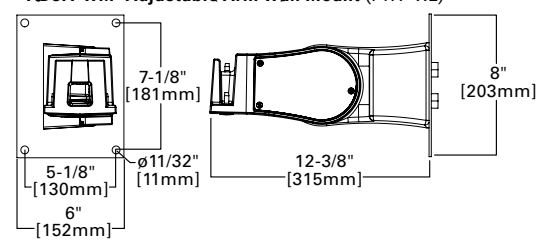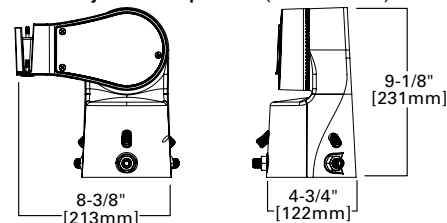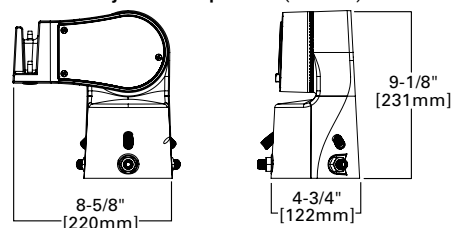SA=QM Pole Mount Arm (PRV & PRV-P)

SA=QM Pole Mount Arm (PRV-XL)

WM=QM Wall Mount Arm (PRV & PRV-P)

WM=QM Wall Mount Arm (PRV-XL)

MA=QM Mast Arm (PRV & PRV-P)

MA=QM Mast Arm (PRV-XL)

ADJA=Adjustable Arm Pole Mount (PRV & PRV-P)

ADJA=Adjustable Arm Pole Mount (PRV-XL)

ADJA-WM=Adjustable Arm Wall Mount (PRV & PRV-P)

ADJA-WM=Adjustable Arm Wall Mount (PRV-XL)

ADJS=Adjustable Slipfitter 3 (PRV & PRV-P)

ADJS=Adjustable Slipfitter 3 (PRV-XL)


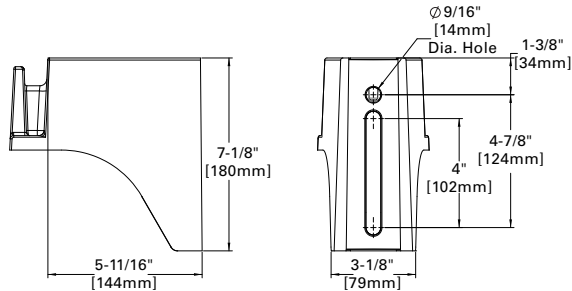


Lumark


Prevail Discrete LED

Mounting Details


SA=QM Pole Mount Arm (PRV-M)




Versatile Mount System




WM=QM Wall Mount Arm (PRV-M)

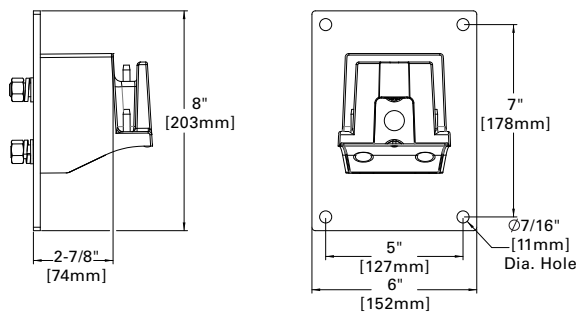


ADJS=Adjustable Slipfitter (PRV-M)

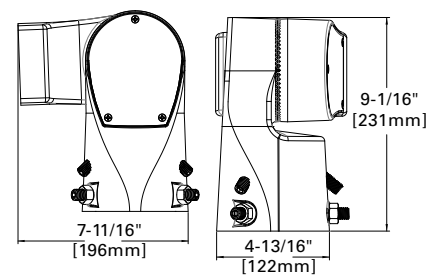


MA=QM Mast Arm (PRV-M)

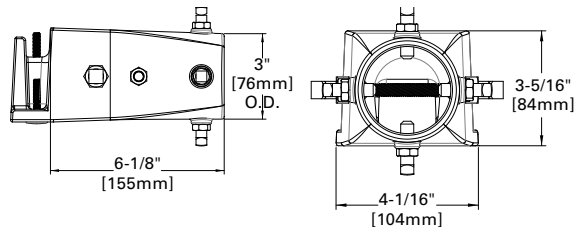


SP2=Adjustable Slipfitter 2-3/8" (PRV-M)

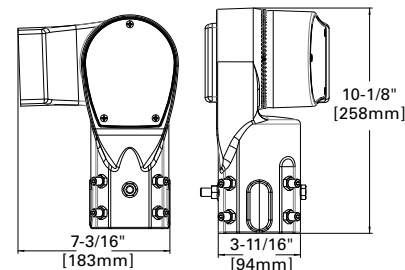

FMA=Fixed Mast Arm (PRV-M)

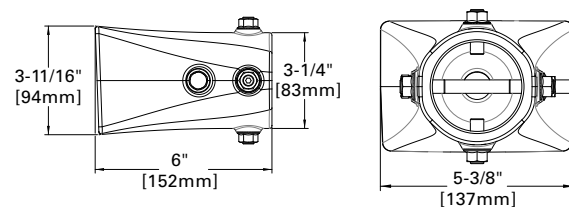

ADJA=Adjustable Pole Mount Arm (PRV-M)

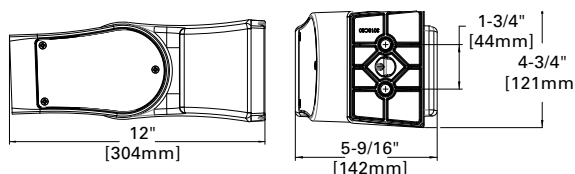



Job Name:
13960 Ironwood Dr Phase II

Catalog Number:
PRV-PA2B-740-U-T4W-SA-BZ

Notes:

Type:

P4



CTA26-183742

Lumark

Prevail Discrete LED


Mounting Details

Mounting Configurations and EPAs

						
Housing Size	Tilt Angle (Degrees)	Arm Mount Single	Arm Mount 2 @ 180°	Arm Mount 2 @ 90°	Arm Mount 3 @ 90°	Arm Mount 4 @ 90°
Prevail Petite	0°	0.54	1.08	0.84	1.38	1.38
	60°	1.68	1.85	2.42	3.15	3.30
Prevail	0°	0.92	1.35	1.42	1.63	1.63
	60°	2.20	2.40	3.05	3.88	4.07
	60° + Full Drop Visor	2.20	2.40	3.25	4.28	4.47
Prevail XL	0°	1.12	2.25	2.13	2.52	2.52
	60°	3.99	4.30	5.26	6.51	6.79
	60° + Full Drop Visor	3.99	4.30	5.59	7.17	7.49
Prevail Maxx	0°	1.28	2.56	1.7	2.69	2.69
	60°	5.09	5.52	6.34	7.49	7.81

NOTE: For 2 PRV's mounted at 90°, requires minimum 3" square or 4" round pole for fixture clearance. For 2 PRV-XL's mounted at 90°, requires minimum 4" square or round pole for fixture clearance. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications

Optical Configurations

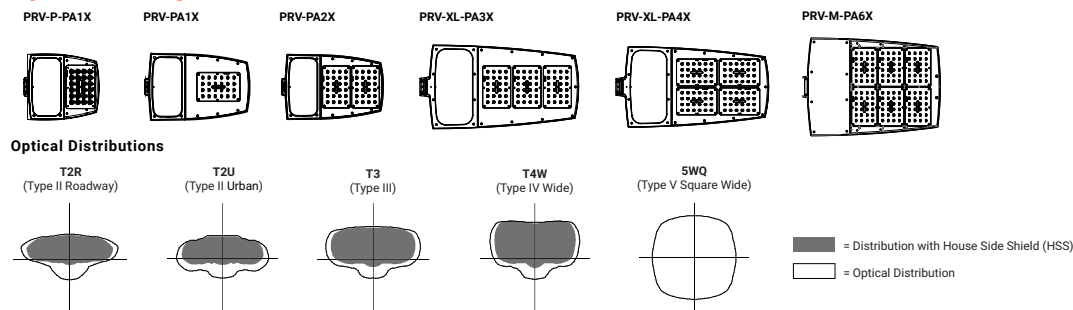

Product Specifications

Optics

- Precision molded polycarbonate optics

Electrical

- 40°C minimum operating temperature
- 40°C maximum operating temperature
- >.9 power factor
- <20% total harmonic distortion
- Class 1 electronic drivers have expected life of 100,000 hours with <1% failure rate
- 0-10V dimming driver is standard with leads external to the fixture
- Standard MOV surge protective device designed to withstand 10kV of transient line surge

Physical Characteristics

- Single-piece die-cast aluminum housing
- Tethered die-cast aluminum door
- Five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Finish is compliant to 3,000 hour salt spray standard (per ASTM B117)
- Versatile, patented, standard mount arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8" (Type M drilling recommended for new installations)
- A knock-out on the standard mounting arm enables round pole mounting
- Adjustable pole and wall mount arms adjust in 5° increments from 0° to 60°; Downward facing orientation only (Type N drilling required for ADJA mount)
- Adjustable slipfitter arm adjusts in 5° increments from -5° to 85°; Downward facing orientation only

Controls

- Luminaire available with the field adjustable dimming controller (FADC) to manually adjust wattage and reduce the total lumen output and light levels; Comes pre-set to the highest position at the lumen output selected

Compliance

- DarkSky approved for 3000K CCT and warmer, with mounting options less than 10° of tilt.
- DLC and DLC Premium listed – visit designlights.org to confirm listed variations
- Prevail and Prevail Petite: 3G vibration rated (all arms)
- Prevail XL Mast Arm: 3G vibration rated
- Prevail XL Standard Arm: 1.5G vibration rated
- Adjustable Arms: 1.5G vibration rated
- BAA domestic preference option meets BAA requirements
- Products that meet BABA through Exemption - Allows any product to satisfy BABA requirements regardless of domestic content manufacturing for projects funded by FHWA through Oct 1st 2025. See notes portion in Ordering Information section for more detail.
- Products that meet BABA through BAA Exemption - FHWA and FTA agencies are utilizing their BAA rules for BABA compliance. Cooper's products with a BAA designation are manufactured in the US and utilize a BAA COTS exemption rule for compliance. To verify a configured product with specific accessories and options meet BABA Domestic Preference Requirements; submit this catalog number to Cooper Lighting Quotation team for validation by our Engineering and Manufacturing teams. See notes portion in Ordering Information section for more detail.

- Please refer to the [DOMESTIC PREFERENCES](http://DOMESTIC.PREFERENCES) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Typical Applications

- Parking lots
- Walkways
- Roadways
- Building Areas

Shipping Data

- Prevail Petite: 18 lbs. (7.94 kgs.)
- Prevail: 20 lbs. (9.09 kgs.)
- Prevail XL: 45 lbs. (20.41 kgs.)
- Prevail Maxx: 49 lbs. (22.23 kgs.)

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Lumark

Prevail Discrete LED

Energy and Performance Data

Power and Lumens

 View PRV-P IES files

 View PRV IES files

 View PRV-XL IES files

Product Family		Prevail Petite				Prevail				Prevail XL				Prevail Maxx			
Light Engine		PA1A	PA1B	PA1C	PA1D	PA1A	PA1B	PA2A	PA2B	PA3A	PA3B	PA4A	PA4B	PA6A	PA6B	PA6C	PA6D
Power (Watts)		31	53	72	93	54	74	113	151	172	234	245	303	274	366	457	544
Drive Current (mA)		375	670	930	1200	670	930	720	970	750	980	785	970	600	800	1000	1200
Input Current @ 120V (A)		0.26	0.44	0.60	0.78	0.45	0.62	0.93	1.26	1.44	1.95	2.04	2.53	2.30	3.05	3.83	4.54
Input Current @ 277V (A)		0.12	0.20	0.28	0.35	0.21	0.28	0.41	0.55	0.62	0.85	0.93	1.12	0.99	1.30	1.62	1.94
Input Current @ 347V (A)		0.10	0.17	0.23	0.29	0.17	0.23	0.33	0.45	0.52	0.70	0.74	0.90	0.78	1.05	1.32	1.60
Input Current @ 480V (A)		0.07	0.13	0.17	0.22	0.12	0.17	0.24	0.33	0.39	0.52	0.53	0.65	0.58	0.76	0.95	1.14
Distribution																	
Type II Roadway	4000K/5000K Lumens	4,505	7,362	9,495	11,300	7,605	9,896	15,811	19,745	24,718	30,648	34,067	39,689	41,611	52,596	61,921	67,899
	BUG Rating	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	147	139	132	121	141	134	141	131	144	131	139	131	152	144	135	125
	3000K Lumens ¹	4,103	6,705	8,647	10,291	6,926	9,012	14,399	17,982	22,511	27,912	31,025	36,145	37,896	47,900	56,392	61,837
Type II Roadway w/ HSS	4000K/5000K Lumens	3,727	6,091	7,855	9,349	6,006	7,815	12,487	15,594	19,521	24,204	26,094	31,334	32,874	41,553	48,919	53,642
	BUG Rating	B0-U0-G1	B0-U0-G2	B0-U0-G2	B1-U0-G2	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B1-U0-G4	B1-U0-G4	B2-U0-G4	B2-U0-G4	B2-U0-G5	B2-U0-G5
	Lumens per Watt	121	115	109	100	111	106	111	103	113	103	107	103	120	114	107	99
	3000K Lumens ¹	3,394	5,547	7,154	8,514	5,470	7,117	11,372	14,201	17,778	22,043	24,502	28,545	29,939	37,843	44,552	48,853
Type II Urban	4000K/5000K Lumens	4,496	7,347	9,476	11,277	7,597	9,886	15,795	19,724	24,692	30,616	34,031	39,647	41,372	52,294	61,565	67,509
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	146	139	131	121	141	134	141	131	144	131	139	131	151	143	135	124
	3000K Lumens ¹	4,095	6,691	8,630	10,271	6,919	9,003	14,384	17,963	22,488	27,882	30,992	36,107	37,678	47,625	56,068	61,481
Type II Urban w/ HSS	4000K/5000K Lumens	3,253	5,316	6,856	8,160	5,297	6,893	11,013	13,753	17,217	21,347	23,728	27,644	28,951	36,594	43,082	47,241
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5
	Lumens per Watt	106	101	95	87	98	93	97	91	100	91	97	91	106	100	94	87
	3000K Lumens ¹	2,963	4,841	6,244	7,431	4,824	6,277	10,029	12,525	15,680	19,441	21,609	25,176	26,366	33,327	39,235	43,023
Type III	4000K/5000K Lumens	4,443	7,261	9,364	11,145	7,575	9,857	15,749	19,667	24,621	30,527	33,932	39,532	41,155	52,020	61,242	67,155
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	145	138	130	119	140	133	141	130	143	130	138	130	150	142	134	123
	3000K Lumens ¹	4,046	6,612	8,528	10,150	6,899	8,977	14,343	17,911	22,423	27,802	30,903	36,002	37,480	47,375	55,774	61,159
Type III w/ HSS	4000K/5000K Lumens	3,406	5,566	7,179	8,543	5,592	7,277	11,626	14,519	18,176	22,536	25,049	29,183	30,159	38,121	44,879	49,212
	BUG Rating	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G4	B2-U0-G4	B2-U0-G5	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	111	105	100	91	104	98	103	96	106	96	102	96	110	104	98	90
	3000K Lumens ¹	3,102	5,069	6,538	7,781	5,093	6,627	10,588	13,222	16,553	20,524	22,813	26,578	27,466	34,717	40,872	44,818
Type IV Wide	4000K/5000K Lumens	4,348	7,106	9,164	10,906	7,484	9,738	15,560	19,431	24,325	30,161	33,525	39,057	41,207	52,086	61,320	67,240
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	142	135	127	117	139	132	139	129	141	129	137	129	151	142	134	124
	3000K Lumens ¹	3,960	6,471	8,346	9,932	6,816	8,869	14,170	17,696	22,153	27,468	30,531	35,570	37,528	47,435	55,845	61,236
Type IV Wide w/ HSS	4000K/5000K Lumens	3,318	5,422	6,993	8,323	5,420	7,053	11,268	14,072	17,617	24,843	24,279	28,286	30,005	37,926	44,650	48,961
	BUG Rating	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3	B1-U0-G4	B2-U0-G4	B2-U0-G4	B2-U0-G5	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	108	103	97	89	100	95	100	93	102	106	99	93	110	104	98	90
	3000K Lumens ¹	3,022	4,938	6,369	7,580	4,936	6,423	10,262	12,816	16,044	19,892	22,111	25,760	27,326	34,540	40,664	44,589
Type V Square Wide	4000K/5000K Lumens	4,497	7,349	9,478	11,280	7,831	10,190	16,281	20,332	25,453	31,559	35,079	40,868	42,947	54,285	63,909	70,079
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B3-U0-G2	B4-U0-G3	B4-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	146	139	131	121	145	138	145	135	148	135	143	135	157	143	136	129
	3000K Lumens ¹	4,095	6,693	8,632	10,273	7,132	9,280	14,827	18,517	23,180	28,741	31,947	37,219	39,112	49,438	58,203	63,822

NOTES:
1. For 3000K or HSS BUG Ratings, refer to published IES files



Job Name:
13960 Ironwood Dr Phase II


Catalog Number:
RPSQ-20-4-11

Notes:

Type:

P4

CTA26-183742

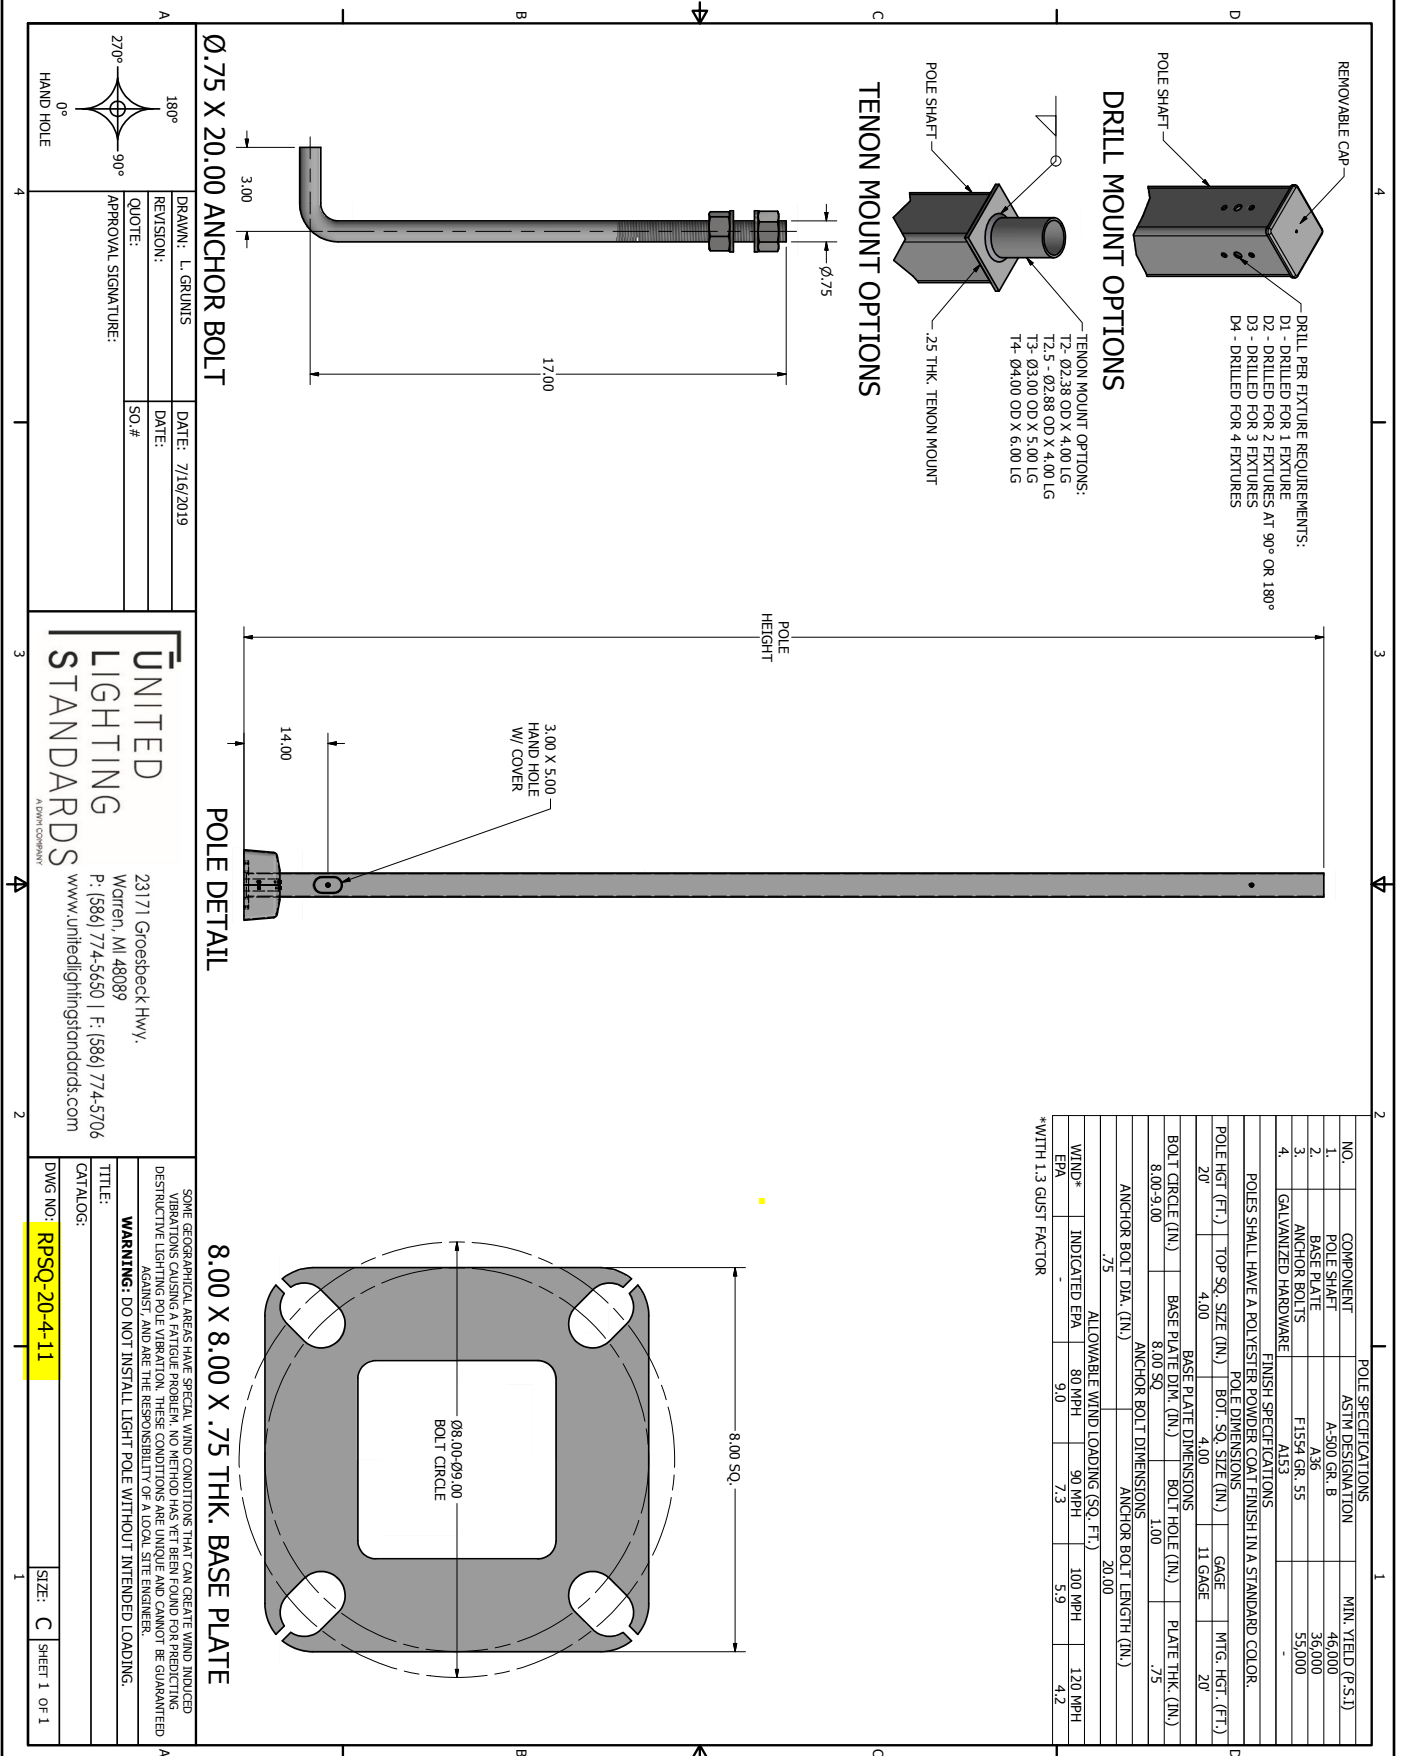



POLE ORDERING GUIDE

ORDER NUMBER TEMPLATE

Example Order Number

Fixture					
Brand	Product	Number			
			Catalog Number	Mounting Type	Fixture Mounting Arrangement
Design	Mounting Height	Shaft Size	Wall Thickness		
RPSQ	20	4	11	AB	T2
			Finish	Options	Accessories
			Design	Orientation	Height From Base
			WB-15	@90	10'
					FH
					@180
					9'

Build Your Order Number

Fixture		
Brand	Product	Number

Catalog Number			Mounting Type	Fixture Mounting Arrangement	Finish
Design	Mounting Height	Shaft Size			

Mounting Type

AB = Anchor Base
EMB = Embedded (Direct Burial)

Finish

Fixture Mounting Arrangement

- D1 D4
- D2@90 T2
- D2@180 T2.5
- D3@90 T3
- D3@120* T4

Options			Accessories		
Design	Orientation	Height From Base	Design	Orientation	Height From Base

Options

- CMB = Camera Mounting Bracket
- CMP = Camera Mounting Plate
- WB-15 = Welded Bracket
- WC = Welded Coupling (denote size)
- WN = Welded Nipple (denote size)
- Festoon = Festoon Provision
- CSBC = Custom Steel Base Cover
- VD = Vibration Damper
- GFCI/ILC = Ground Fault Circuit Interrupter with In-Use Cover
- UL = UL Listed**

Accessories

- TB = Transformer Base*
- ABS-BC = ABS Base Cover*
- LW = Lowering Winch
- LW-ELECTRIC = Electric Lowering Winch
- BA = Banner Arm
- FH = Flag Holder
- PTTA = Pole Top Tenon Adapter*

*Round poles only

Refer to the Mounting Orientation Guide on the next page of this file.

Contact us for custom colors.

*See our online product catalog for complete catalog numbers of these options and accessories.

** UL Listed labeling is available for catalog steel and aluminum poles—both Commercial & Industrial and Roadway. UL Listed labeling is not available for brackets. UL Listing must be specified at the time of order.

Project		Catalog #		Type	
Prepared by		Notes		Date	




Interactive Menu

- Ordering Information page 2
- Mounting Details page 3, 4
- Optical Configurations page 5
- Product Specifications page 5
- Energy and Performance Data page 6, 7
- Control Options page 8

Quick Facts

- Lumen packages range from 4,800 - 84,000 lumens (35W - 588W)
- Replaces 70W up to 1,000W HID equivalents
- Efficacies up to 160 lumens per watt
- Energy and maintenance savings up to 85% versus HID solutions
- Standard universal quick mount arm with universal drill pattern

Dimensional Details

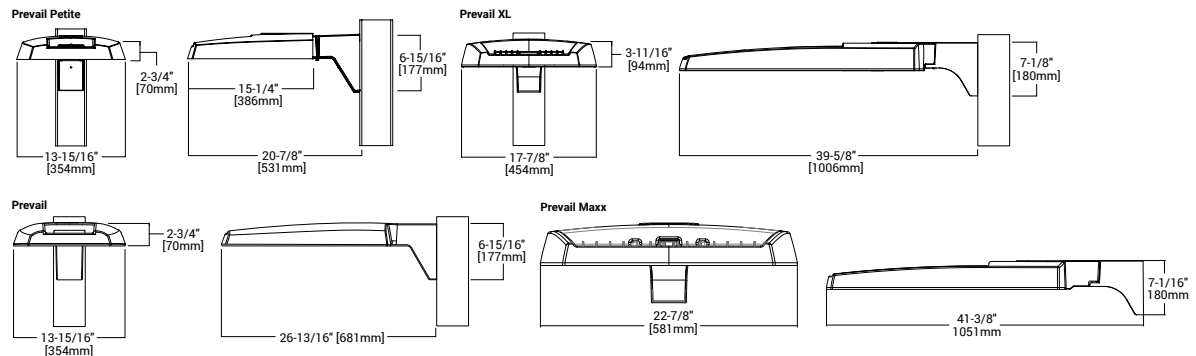

NOTES:
 1. Visit <https://www.designlights.org/search/> to confirm qualification. Not all product variations are DLC qualified.
 2. IDA Certified for 3000K CCT and warmer only.

Lumark

Prevail LED

Area / Site Luminaire

Product Features



Product Certifications



Connected Systems

- WaveLinX PRO Wireless
- WaveLinX LITE Wireless

Submitted by CTA Lighting & Controls		Catalog Number: PRV-C25-740-D-UNV-T4-WM-BZ	Type: W4
	Job Name: 13960 Ironwood Dr Phase II		
		Notes:	CTA26-183742

Lumark

Prevail LED

Ordering Information

SAMPLE NUMBER: PRV-XL-C75-740-D-UNV-T4-SA-BZ

Product Family ^{1,2}	Light Engine ⁴	Color Temperature	Driver	Voltage	Distribution	Mounting	Color
PRV-P =Prevail Petite BAA-PRV-P =Prevail Petite BAA Compliant ³ TAA-PRV-P =Prevail Petite TAA Compliant ³ BABA-PRV-P =Prevail Petite BABA Build America Buy America Act Compliant ³⁰	C10 =(1 LED) 4,900 Nominal Lumens C15 =(1 LED) 6,900 Nominal Lumens C20 =(1 LED) 9,800 Nominal Lumens C25 =(1 LED) 11,800 Nominal Lumens	740=70CRI, 4000K 727=70CRI, 2700K 730=70CRI, 3000K 750=70CRI, 5000K 8540=85CRI, 4000K	D=Dimming (0-10V)	UNV=Universal (120-277V) H=High Voltage, 347-480V 8=480V ⁵ 9=347V DV=DuraVolt (277-480V) ^{5,6}	T2=Type II T3=Type III T4=Type IV T5=Type V	SA =QM Standard Versatile Arm MA =QM Mast Arm FMA = Fixed Mast Arm ²⁶ WM=QM Wall Mount Arm ADJA-WM =Adjustable Arm-Wall Mount ²⁸ ADJA =Adjustable Arm-Pole Mount ²⁸ ADJS =Adjustable Arm-Slipfitter, 3" vertical tenon ²⁸ SP2 =Adjustable Arm-Slipfitter, 2 3/8" vertical tenon ^{25, 28}	BZ=Bronze AP =Grey BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White
PRV-Prevail BAA-PRV =Prevail BAA Compliant ³ TAA-PRV =Prevail TAA Compliant ³ BABA-PRV =Prevail BABA Build America Buy America Act Compliant ³⁰	C15 =(1 LED) 7,100 Nominal Lumens C25 =(2 LEDs) 13,100 Nominal Lumens C40 =(2 LEDs) 17,100 Nominal Lumens C60 =(2 LEDs) 20,000 Nominal Lumens						
PRV-XL =Prevail XL BAA-PRV-XL =Prevail XL BAA Compliant ³ TAA-PRV-XL =Prevail XL TAA Compliant ³ BABA-PRV-XL =Prevail XL BABA Build America Buy America Act Compliant ³⁰	C75 =(4 LED) 26,100 Nominal Lumens C100 =(4 LED) 31,000 Nominal Lumens C125 =(4 LED) 36,000 Nominal Lumens C150 =(6 LED) 41,100 Nominal Lumens C175 =(6 LED) 48,600 Nominal Lumens						
PRV-M =Prevail Maxx BAA-PRV-M =Prevail Maxx BAA Compliant ³ TAA-PRV-M =Prevail MaxxTAA Compliant ³ BABA-PRV-M =Prevail Maxx BABA Build America Buy America Act Compliant ³⁰	C200 =(9 LED) 48,000 Nominal Lumens C225 =(9 LED) 56,000 Nominal Lumens C250 =(9 LED) 65,000 Nominal Lumens C275 =(9 LED) 73,000 Nominal Lumens						
Options (Add as Suffix)			Accessories (Order Separately) ^{20,21}				
CC =Coastal Construction finish ⁴ HSS =House Side Shield ⁷ L90 =Optics Rotated 90° Left R90 =Optics Rotated 90° Right 10K =10kV/10KA UL 1449 Fused Surge Protective Device 20MSP =20kV MOV Surge Protective Device 20K =20kV UL 1449 Fused Surge Protective Device HA =50°C High Ambient Temperature ⁸ PR =NEMA 3-PIN Twistlock Photocontrol Receptacle ¹⁰ FADC =Field Adjustable Dimming Controller ²⁹ MS/DIM-L08 =Dimming Motion and Daylight Sensor, IR Remote Programmable, < 8' Mounting Height ^{11,12} MS/DIM-L20 =Dimming Motion and Daylight Sensor, IR Remote Programmable, 8' - 20' Mounting Height ^{11,12} MS/DIM-L40 =Dimming Motion and Daylight Sensor, IR Remote Programmable, 21' - 40' Mounting ^{11,12}	SPB1 =Dimming Motion and Daylight Sensor, Bluetooth Programmable, < 8' Mounting Height ^{11,13} SPB2 =Dimming Motion and Daylight Sensor, Bluetooth Programmable, 8' - 20' Mounting Height ^{11,13} SPB4 =Dimming Motion and Daylight Sensor, Bluetooth Programmable, 21' - 40' Mounting Height ^{11,13,26,27} WPS2XX =WaveLinx Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7' - 15' Mounting ^{11,14,15,16} WPS4XX =WaveLinx Pro, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15' - 40' Mounting ^{11,14,15,16} WLS2XX =WaveLinx Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 7' - 15' Mounting ^{11,14,15,16} WLS4XX =WaveLinx Lite, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15' - 40' Mounting ^{11,14,15,16}	PRVSA-XX =Standard Arm Mounting Kit ²¹ PRVMA-XX =Mast Arm Mounting Kit ²¹ PRVWM-XX =Wall Mount Kit ²¹ PRV-ADJA-XX =Adjustable Arm - Pole Mount Kit ²¹ PRV-ADJS-XX =Adjustable Arm - Slipfitter Kit ²¹ PRV-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²¹ PRVXLSA-XX =Standard Arm Mounting Kit ²⁷ PRVXLSMA-XX =Mast Arm Mounting Kit ²⁷ PRVXLWM-XX =Wall Mount Kit ²⁷ PRV-XL-ADJA-XX =Adjustable Arm - Pole Mount Kit ²⁷ PRV-XL-ADJS-XX =Adjustable Arm - Slipfitter Kit ²⁷ PRV-XL-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²⁷ PRV-M-ADJA-XX =Adjustable Arm - Pole Mount Kit ²⁸ PRV-M-ADJS-XX =Adjustable Arm - Slipfitter Kit ²⁸ PRV-M-ADJA-WM-XX =Adjustable Arm - Wall Mount Kit ²⁸ MA1010-XX =Single Tenon Adapter for 3-1/2" O.D. Tenon	MA1011-XX-2 @180° Tenon Adapter for 3-1/2" O.D. Tenon MA1017-XX =Single Tenon Adapter for 2-3/8" O.D. Tenon MA1018-XX-2 @180° Tenon Adapter for 2-3/8" O.D. Tenon SRA238 =Tenon Adapter from 3" to 2-3/8" PRV/COB-FDV =Full Drop Visor ²² PRVXL/COB-FDV =Full Drop Visor ²² HS/VERD =House Side Shield Kit ^{7,23} VGS-F/B = Vertical Glare Shield Kit, Front/Back ²³ VGS-SIDE =Vertical Glare Shield Kit, Side ²³ OA/RA1013 =Photocontrol Shorting Cap OA/RA1014 =NEMA Photocontrol - 120V OA/RA1016 =NEMA Photocontrol - Multi-Tap 105-285V OA/RA1201 =NEMA Photocontrol - 347V OA/RA1027 =NEMA Photocontrol - 480V FSIR-100 =Wireless Configuration Tool for Occupancy Sensor ²⁴ WOLC-7P-10A =WaveLinx Outdoor Control Module (7-PIN) ²⁵				
NOTES: 1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. 2. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to installation instructions IB500002EN and pole white paper WP513001EN for additional support information. 3. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC.PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 4. Standard 4000K CCT and 70CRI. 5. 480V not to be used with ungrounded or impedance grounded systems. 6. DuraVolt drivers feature added protection from power quality issues such as loss of neutral, transients and voltage fluctuations. Visit www.signify.com/duravolt for more information. 7. House Side Shield not suitable with T5 distribution. Not available with PRV-C60 lumen package. 8. Not available with PRV-C60 lumen package. Not available with PRV-P-C25 lumen package. 9. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. 10. If DuraVolt (DV) is specified, use a photocontrol that matches the input voltage used. 11. Controls system is not available in combination with a photocontrol receptacle (PR & PER7) or another controls system (MS or SPB). Option not available with DuraVolt (DV) voltage option. 12. Utilizes the Wattstopper sensor FSP-211. Sensor color white unless specified otherwise via PDR. To field-configure, order FSIR-100 accessory separately. 13. Utilizes the Wattstopper sensor FSP-3XX series. Sensor color determined by product finish. See Sensor Color Reference Table. Field-configures via mobile application. See Controls section for details. 14. Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F). 15. For the device to be field-configurable, requires WAC Gateway components WAC-PoE and WPQ0E-120 in appropriate quantities. Only compatible with WaveLinx system and software and requires system components to be installed for operation. See website for more WaveLinx application information. 16. Replace XX with sensor color (WH, BZ, or BK). 17. Only available in PRV-XL configurations C75, C100, C125, C150, or C175. 18. Not available with 347V, 480V, DV, or HA options. 19. Replace XX with paint color. 20. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. 21. Not for use with PRV-XL or PRV-M configurations. 22. Only for use with PRV. Not applicable to PRV-M, PRV-XL, or PRV-P. 23. Must order one per optic/LED when ordering as a field-installable accessory (1, 2, 4, 6 or 9). 24. This tool enables adjustment to Motion Sensor (MS) parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative for more information. 25. Requires 7-PIN NEMA twistlock photocontrol receptacle (PR & PER7) option. The WOLC-7 cannot be used in conjunction with other controls systems (MS or LWR). Operates on 120-347V input voltages. 26. Only for use with PRV-M configurations. 27. Only for use with PRV-XL configurations. 28. Fixed for PRV-M. 29. Cannot be used with PR7 or other motion response control options 30. Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the DOMESTIC.PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.							

Stock Ordering Information

Product Family ¹	Light Engine	Voltage	Distribution
PRVS=Prevail	C15=(1 LED) 7,100 Nominal Lumens C25=(2 LEDs) 13,100 Nominal Lumens C40=(2 LEDs) 17,100 Nominal Lumens C60=(2 LEDs) 20,000 Nominal Lumens	UNV=Universal (120-277V) 347=347V ²	T3=Type III T4=Type IV
PRVS-XL=Prevail XL	C75=(4 LED) 26,100 Nominal Lumens C100=(4 LED) 31,000 Nominal Lumens C125=(4 LED) 36,000 Nominal Lumens C150=(6 LED) 41,100 Nominal Lumens C175=(6 LED) 48,600 Nominal Lumens		
NOTES: 1. All stock configurations are standard 4000K/70CRI, bronze finish, and include the standard versatile mounting arm. 2. Only available in PRVS configurations C15, C25, C40 or C60.			




Lumark


Prevail LED

Mounting Details


SA=QM Pole Mount Arm (PRV & PRV-P)

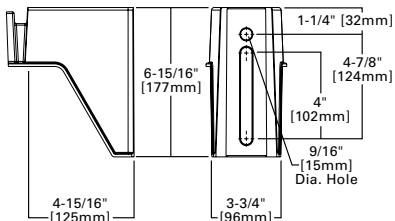


SA=QM Pole Mount Arm (PRV-XL)

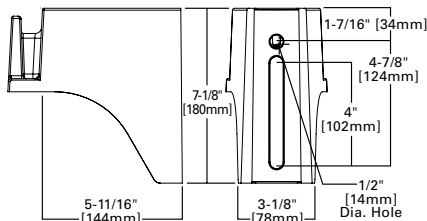


WM=QM Wall Mount Arm (PRV & PRV-P)




WM=QM Wall Mount Arm (PRV-XL)

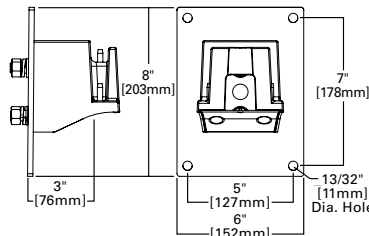


MA=QM Mast Arm (PRV & PRV-P)




MA=QM Mast Arm (PRV-XL)

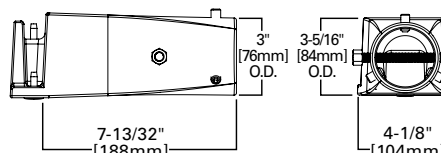


ADJA=Adjustable Arm Pole Mount (PRV & PRV-P)

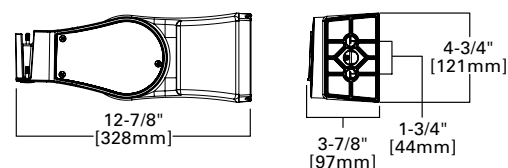


ADJA=Adjustable Arm Pole Mount (PRV-XL)

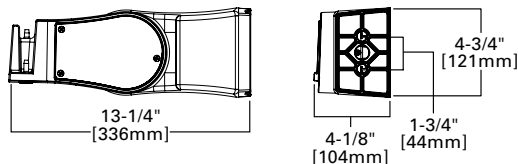


ADJA-WM=Adjustable Arm Wall Mount (PRV & PRV-P)

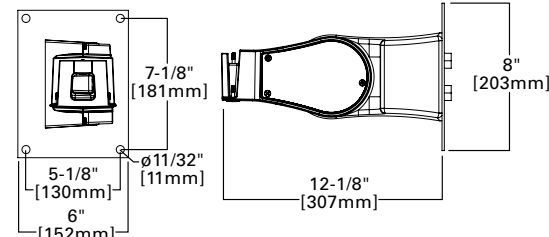


ADJA-WM=Adjustable Arm Wall Mount (PRV-XL)








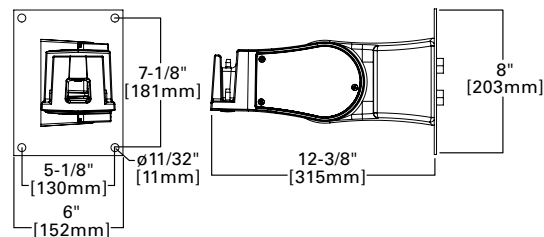


ADJS=Adjustable Slipfitter 3 (PRV & PRV-P)

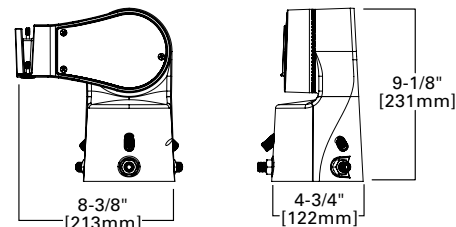

ADJS=Adjustable Slipfitter 3 (PRV-XL)

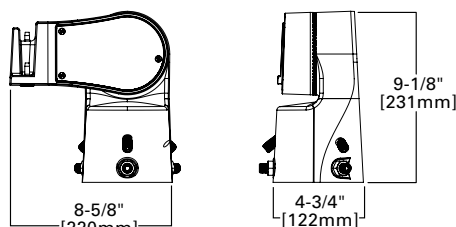

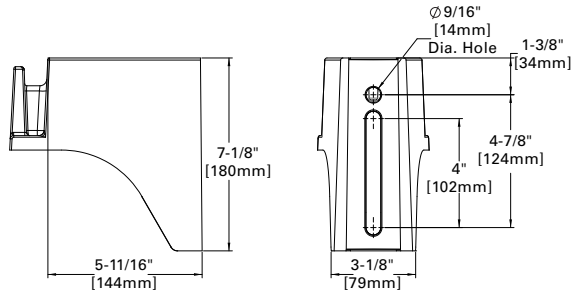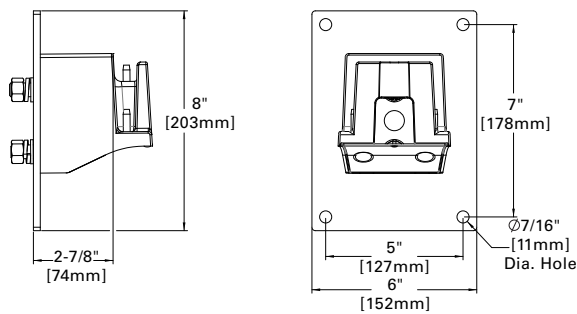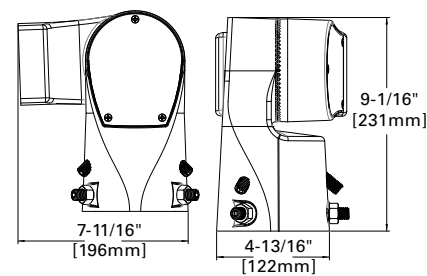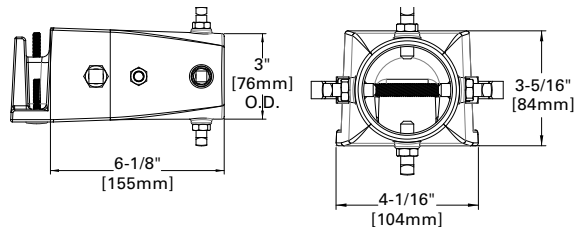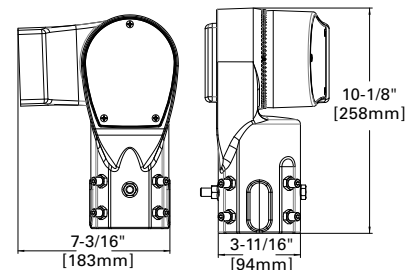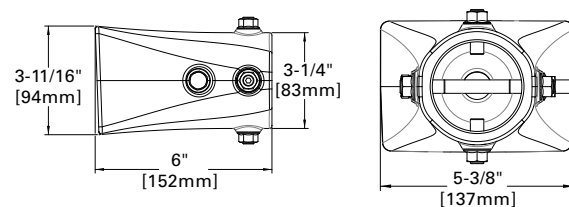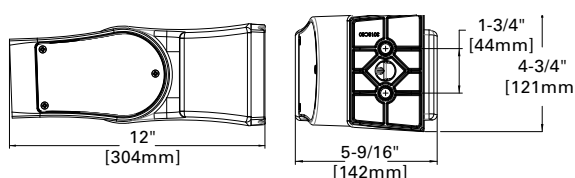**Lumark****Prevail LED****Mounting Details****SA=QM Pole Mount Arm (PRV-M)****Versatile Mount System****WM=QM Wall Mount Arm (PRV-M)****ADJS=Adjustable Slipfitter (PRV-M)****MA=QM Mast Arm (PRV-M)****SP2=Adjustable Slipfitter 2-3/8" (PRV-M)****FMA=Fixed Mast Arm (PRV-M)****DM=Direct Pole Mount Arm (PRV-M)**



Job Name:
13960 Ironwood Dr Phase II

Catalog Number:
PRV-C25-740-D-UNV-T4-WM-BZ

Notes:

Type:

W4

CTA26-183742

Lumark

Prevail LED

Mounting Details

Mounting Configurations and EPAs

Housing Size	Tilt Angle (Degrees)	Arm Mount Single	Arm Mount 2 @ 180°	Arm Mount 2 @ 90°	Arm Mount 3 @ 90°	Arm Mount 4 @ 90°
Prevail Petite	0°	0.54	1.08	0.84	1.38	1.38
	60°	1.68	1.85	2.42	3.15	3.30
Prevail	0°	0.92	1.35	1.42	1.63	1.63
	60°	2.20	2.40	3.05	3.88	4.07
	60° + Full Drop Visor	2.20	2.40	3.25	4.28	4.47
Prevail XL	0°	1.12	2.25	2.13	2.52	2.52
	60°	3.99	4.30	5.26	6.51	6.79
	60° + Full Drop Visor	3.99	4.30	5.59	7.17	7.49
Prevail Maxx	0°	1.28	2.56	1.7	2.69	2.69
	60°	5.09	5.52	6.34	7.49	7.81

NOTE: For 2 PRV's mounted at 90°, requires minimum 3" square or 4" round pole for fixture clearance. For 2 PRV-XL's mounted at 90°, requires minimum 4" square or round pole for fixture clearance. Customer is responsible for engineering analysis to confirm pole and fixture compatibility for applications.

Optical Configurations

PRV-P-C10/C15/C20/C25
(4,900/6,900/9,800/11,800
Nominal Lumens)




PRV-C15
(7,100 Nominal Lumens)




PRV-C25/C40/C60
(13,100/17,100/20,000
Nominal Lumens)




PRV-XL-C75/C100/C125
(26,100/31,000/36,300 Nominal Lumens)







PRV-XL-C150/C175
(41,100/48,600 Nominal Lumens)



PRV-M-PA&K
(50,000/60,000/70,000/80,000 Nominal Lumens)



Optical Distributions



■ = Distribution with House Side Shield (HSS)
□ = Optical Distribution

Product Specifications

Optics

- Precision molded polycarbonate optics

Electrical

- 40°C minimum operating temperature
- 40°C maximum operating temperature
- >.9 power factor
- <20% total harmonic distortion
- Class 1 electronic drivers have expected life of 100,000 hours with <1% failure rate
- 0-10V dimming driver is standard with leads external to the fixture
- Standard MOV surge protective device designed to withstand 10kV of transient line surge

Physical Characteristics

- Single-piece die-cast aluminum housing
- Tethered die-cast aluminum door
- Five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Finish is compliant to 3,000 hour salt spray standard (per ASTM B117)
- Versatile, patented, standard mount arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8" (Type M drilling recommended for new installations)
- A knock-out on the standard mounting arm enables round pole mounting
- Adjustable pole and wall mount arms adjust in 5° increments from 0° to 60°; Downward facing orientation only (Type N drilling required for ADJA mount)
- Adjustable slipfitter arm adjusts in 5° increments from -5° to 85°; Downward facing orientation only

Controls

- Luminaire available with the field adjustable dimming controller (FADC) to manually adjust wattage and reduce the total lumen output and light levels; Comes pre-set to the highest position at the lumen output selected

Compliance

- DarkSky approved for 3000K CCT and warmer, with mounting options less than 10° of tilt.
- DLC and DLC Premium listed – visit designlights.org to confirm listed variations
- Prevail and Prevail Petite: 3G vibration rated
- Prevail XL Mast Arm: 3G vibration rated
- Prevail XL Standard Arm: 1.5G vibration rated
- Adjustable Arms: 1.5G vibration rated
- BAA domestic preference option meets BAA requirements. See [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information
- FHWA and FTA agencies are utilizing their BAA rules for BABA compliance. Cooper's products with a BAA designation are manufactured in the US and utilize a BAA COTS exemption rule for compliance. To verify a configured product with specific accessories and options meet BABA Domestic Preference Requirements; submit this catalog number to Cooper Lighting Quotation team for validation by our Engineering and Manufacturing teams. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Typical Applications

- Parking lots
- Walkways
- Roadways
- Building Areas

Shipping Data

- Prevail Petite: 18 lbs. (7.94 kgs.)
- Prevail: 20 lbs. (9.09 kgs.)
- Prevail XL: 45 lbs. (20.41 kgs.)
- Prevail Maxx: 49 lbs. (22.23 kgs.)

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Lumark
Prevail LED

Energy and Performance Data

Power and Lumens

[View PRV-P IES files](#)
[View PRV IES files](#)
[View PRV-XL IES files](#)

Product Family		Prevail Petite				Prevail				Prevail XL					Prevail Maxx			
Light Engine		C10	C15	C20	C25	C15	C25	C40	C60	C75	C100	C125	C150	C175	C200	C225	C250	C275
Power (Watts)		35	49	73	94	52	96	131	153	176	217	264	285	346	346	418	487	588
Input Current @ 120V (A)		0.29	0.41	0.61	0.79	0.43	0.80	1.09	1.32	1.50	1.84	2.21	2.38	2.92	2.89	3.49	4.06	4.90
Input Current @ 277V (A)		0.13	0.18	0.27	0.35	0.19	0.35	0.48	0.57	0.66	0.82	0.97	1.04	1.25	1.26	1.51	1.72	2.06
Input Current @ 347V (A)		0.11	0.16	0.23	0.29	0.17	0.30	0.41	0.48	0.54	0.66	0.79	0.84	1.02	1.00	1.21	1.40	1.70
Input Current @ 480V (A)		0.08	0.12	0.17	0.22	0.12	0.22	0.30	0.35	0.40	0.48	0.57	0.62	0.74	0.73	0.88	1.00	1.21
Distribution ¹																		
Type II	4000K Lumens	4,775	6,717	9,542	11,521	7,123	13,205	17,172	20,083	26,263	31,231	36,503	41,349	48,876	50,349	59,444	68,447	79,322
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	138	137	131	122	137	138	131	131	149	144	138	145	141	146	142	141	135
	3000K Lumens ¹	4,869	6,595	9,369	11,312	6,994	12,965	16,860	19,718	25,786	30,664	35,840	40,598	47,989	49,437	58,368	67,208	77,886
Type III	4000K Lumens	4,782	6,727	9,556	11,538	7,111	13,183	17,144	20,050	26,120	31,061	36,304	41,124	48,610	50,162	59,223	68,193	79,027
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	138	137	131	123	137	137	131	131	148	143	138	144	140	145	142	140	135
	3000K Lumens ¹	4,695	6,605	9,383	11,329	6,982	12,944	16,832	19,686	25,646	30,497	35,645	40,377	47,727	49,254	58,151	66,958	77,596
Type IV	4000K Lumens	4,880	6,865	9,752	11,774	7,088	13,140	17,087	19,984	26,098	31,035	36,274	41,089	48,569	50,575	59,711	68,754	79,678
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B1-U0-G3	B2-U0-G4	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	141	140	134	125	136	137	130	131	148	143	137	144	140	146	143	141	136
	3000K Lumens ¹	4,792	6,740	9,575	11,561	6,959	12,901	16,777	19,621	25,624	30,471	35,615	40,343	47,687	49,659	58,630	67,510	78,235
Type V	4000K Lumens	5,067	7,128	10,126	12,226	7,576	14,045	18,264	21,360	28,129	33,450	39,097	44,287	52,349	53,531	63,201	72,773	84,335
	BUG Rating	B3-U0-G2	B3-U0-G2	B4-U0-G3	B4-U0-G3	B3-U0-G3	B4-U0-G3	B4-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	146	145	139	130	146	146	139	140	160	154	148	155	151	155	151	150	144
	3000K Lumens ¹	4,975	6,999	9,942	12,004	7,438	13,790	17,932	20,972	27,618	32,843	38,387	43,483	51,398	52,562	62,057	71,455	82,808

NOTES:
1. For 3000K, 5000K or HSS data, refer to published IES files.